


TITAN+G

SEGATRICE A NASTRO MANUALE / GRAVITAZIONALE PER TAGLI DA 0° A 60° A DESTRA
 MANUAL / GRAVITATIONAL BAND SAW MACHINE FOR CUTS FROM 0° TO 60° RIGHT



mm	Ø	a b axb	a b axb	a b axb
0°	260	260	260x370	260x370
45° →	260	260	120x290	260x260
60° →	180	180	90x190	180x180

STANDARD

- ◆ Sistema di discesa gravitazionale dell'arco con cilindro idraulico e valvola di regolazione discesa in posizione frontale
- ◆ Finecorsa d'arresto lama a fine taglio
- ◆ Solida morsa in ghisa con avvicinamento manuale e bloccaggio rapido del pezzo a leva
- ◆ Rotazione arco con fermi di battuta a 0°, 45° e 60°
- ◆ Scala graduata per lettura angolo e robusta leva di bloccaggio



- ◆ Head gravity feeding system, hydraulic cylinder and front valve for feeding regulation
- ◆ Blade stopping limit switch at the end of the cut
- ◆ Solid cast iron vice with manual feeding and lever fast piece clamping
- ◆ Head rotation angle stop at 0°, 45° and 60°
- ◆ Graduated scale for angle measure reading and strong locking lever

OPTIONAL

OPTIONAL

KIT PN - VAT - NB1 BOX - NB2 BOX - LX - MT - VHZ
 - SR D - PAT 0°

DOTAZIONI ACCESSORIE


ACCESSORY EQUIPMENTS

RP2G - RP1G - C2 - CRC - CRS - RRS - FM...RS



Kit G per discesa gravitazionale dell'arco montato di serie.

Kit G for a gravitational head descent as standard on this model.

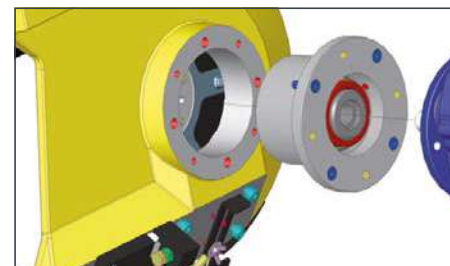

Gruppo flangia con cuscinetti conici contrapposti a sostegno del volano motore.

Flange unit with conical bearings supporting the motor wheel.



Pannello comandi in posizione ergonomica per impostare i parametri di taglio.

Control panel in ergonomic position for the setting of the cutting parameters.

lxhxs
 3300x27x0,9
 mm

35-70
 m/min

TITAN+G

MOTOR

1,3
 kW

0÷120
 m/min

TITAN+G+VHZ

MOTOR

1,1
 kW

H2O

0,08
 kW

530
 kg

0,9x1,8x1,5 m
 axbxc

960±10
 mm

